

# TEMPORARY WEDGE ANCHOR CONCRETE

**Safe. Secure. Portable.**

All PFAS's require an anchorage connector for a secure attachment point. FallTech's Concrete Temporary Wedge Anchor is lightweight and compact and features a swaged D tie-off point. The anchor is portable and reusable and offers a trigger pull for easy installation and removal. The wedge anchor is designed for use in fully cured concrete for vertical wall and overhead ceiling applications.

- **Movement** – A Swiveling Eye design provides 360° D-ring rotation and the spring and cable shaft allows for unrestricted pivot movement.
- **Installation** – Requires a ¾" x 3 ½" min. hole.
- **Versatile** – Portable and reusable structure mount options for concrete.
- **Strong** – High-strength steel and aluminum construction rated for supporting a load of 5,000 lb.
- **Use** – Must be used in cured concrete with a minimum compression strength of 3,000 PSI.
- **Removable/Reusable** – The anchor can be removed and simply re-installed in a new location.
- Rated for up to a 310 lbs. worker ANSI / 425 lbs. OSHA.
- Complies with ANSI Z359.1-2007 and OSHA 1910.66 and 1926.502.



**7440S**

Concrete | Temporary Wedge Anchor, Swivel


To learn more visit us at:

[www.falltech.com](http://www.falltech.com)




### 7440 Concrete | Temporary Wedge Anchor

- Reusable 3/4" multi-directional temporary anchor.
- High-strength steel and aluminum construction rated for supporting a load of 5,000 lb.
- Designed for use in fully cured concrete with a minimum compression strength of 3,000 PSI.
- Rated for up to a 310 lbs. worker ANSI / 425 lbs. OSHA.
- Complies with ANSI Z359.1-2007 and OSHA 1910.66 and 1926.502.

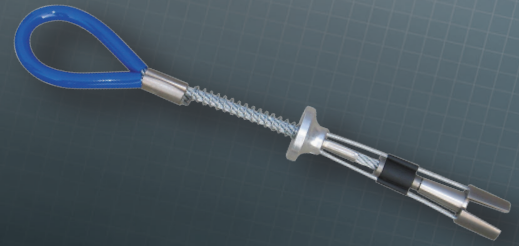

### 7441 Concrete | Temporary Wedge Anchor

- Reusable 1" multi-directional temporary anchor.
- High-strength steel and aluminum construction rated for supporting a load of 10,000 lb.
- Designed for use in fully cured concrete with a minimum compression strength of 3,000 PSI.
- Rated for up to a 310 lbs. worker ANSI / 425 lbs. OSHA.
- Complies with ANSI Z359.1-2007 and OSHA 1910.66 and 1926.502.

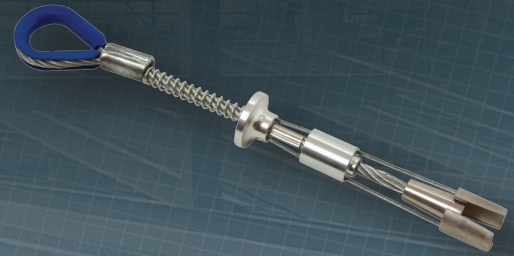

### 7442 Concrete | Temporary Toggle Anchor

- Reusable 3/4" multi-directional temporary anchor.
- High-strength steel and aluminum construction rated for supporting a load of 5,000 lb.
- Designed for use in hollow core, pre-cast concrete structures with a minimum compression strength of 3,000 PSI.
- Rated for up to a 310 lbs. worker ANSI / 425 lbs. OSHA.
- Complies with ANSI Z359.1-2007 and OSHA 1910.66 and 1926.502.

