

# S-5!<sup>TM</sup>

The Right Way!

S-5-S Clamp




## The S-5-S Clamp

The S-5-S clamp is an extraordinarily versatile clamp. It was created especially for popular snap-together profiles—including residential profiles by Taylor Metals and Easy Lock Standing Seam. For horizontal seams under .540 inches, like the Firestone UC4, the S-5-S or S-5-S Mini can be used to avoid having to crimp the seam.

Its simple design and ample size make it so strong and versatile it can be used with S-5!<sup>TM</sup> snow retention products and other heavy-duty applications.

Installation is as simple as placing the clamp on the seam and tightening the patented round-point setscrews to the specified tension. Then, affix ancillary items using the bolt provided. Go to [www.S-5.com/tools](http://www.S-5.com/tools) for information and tools available for properly attaching and tensioning S-5!<sup>TM</sup> clamps.

Thanks to our patented round-point setscrews, S-5!<sup>TM</sup> clamps do not pierce metal roof paneling, thereby protecting roof coatings and weather-tightness warranties.

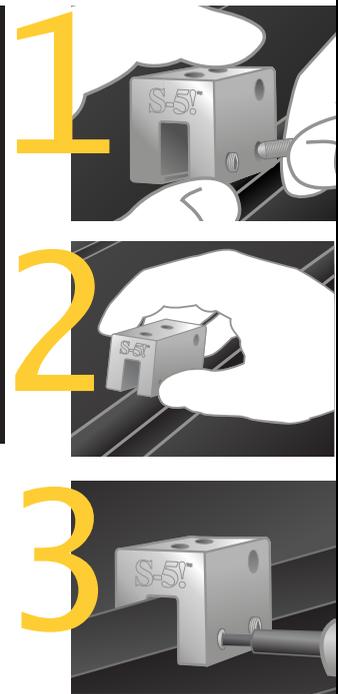

## The S-5-S Mini



The S-5-S Mini is a medium-duty, non-penetrating seam clamp. (A bit shorter than the S-5-S and having one setscrew rather than two.) The Mini is the choice for attaching all kinds of rooftop accessories: signs, walkways, satellite dishes, antennas, rooftop lighting, lightning protection systems, solar arrays, exhaust stack bracing, conduit, condensate lines, mechanical equipment—just about anything!\*

\*S-5!<sup>TM</sup> Mini clamps can be used with RamGard<sup>®</sup> unitized snow guards, but are not compatible and should not be used with S-5!<sup>TM</sup> SnoRail<sup>™</sup>/SnoFence<sup>™</sup> or ColorGard<sup>®</sup> snow retention systems.

Attach almost **anything** to standing seam metal roofs without piercing the panel!


888-825-3432

[www.S-5.com](http://www.S-5.com)


# S-5!™

The Right Way!

## S-5-S

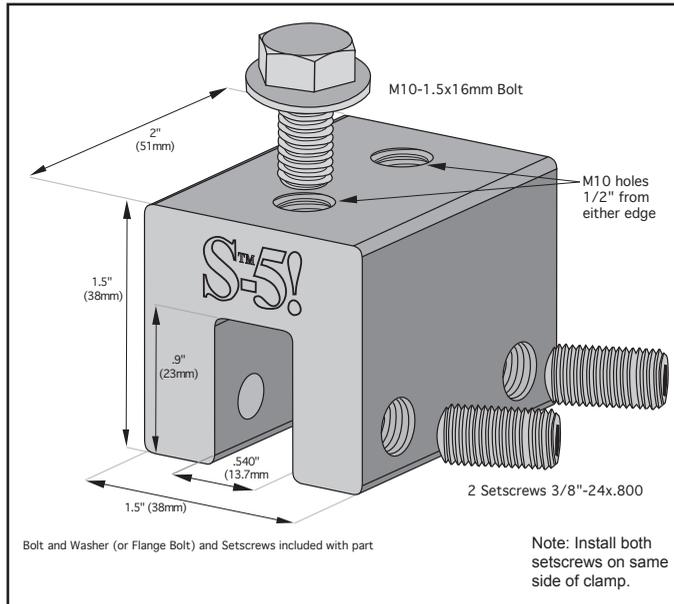

## S-5-S Mini

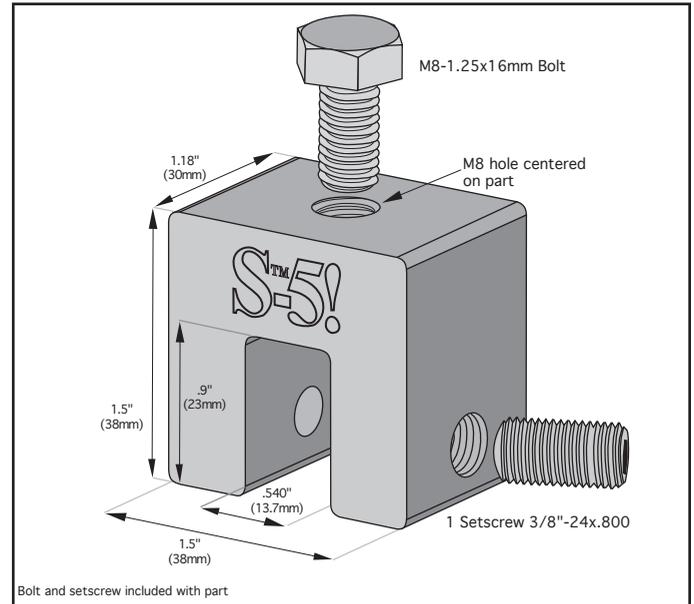

The S-5-S and S-5-S Mini clamps are each furnished with the hardware shown above. Each box also includes a bit tip for tightening setscrews using an electric screw gun. A structural aluminum attachment clamp, the S-5-S is compatible with most common metal roofing materials excluding copper. All included hardware is stainless steel. Please visit [www.S-5.com](http://www.S-5.com) for more information including CAD details, metallurgical compatibilities and specifications.



The S-5-S clamp has been tested for load-to-failure results on most major brands and profiles of standing seam roofing. The independent lab test data found at [www.S-5.com](http://www.S-5.com) can be used for load-critical designs and applications. S-5!™ holding strength is unmatched in the industry.

**The strength of the S-5-S clamp is in its simple design. The patented setscrews will slightly dimple the metal seam material but not pierce it—leaving roof warranties intact.**



### S-5!™ Warning! Please use this product responsibly!

Products are protected by multiple U.S. and foreign patents. Visit the website at [www.S-5.com](http://www.S-5.com) for complete information on patents and trademarks. For maximum holding strength, setscrews should be tensioned and re-tensioned as the seam material compresses. Clamp setscrew tension should be verified using a calibrated torque wrench between 160 and 180 inch pounds when used on 22ga steel and between 130 and 150 inch pounds for all other metals and thinner gauges of steel. Consult the S-5!™ website at [www.S-5.com](http://www.S-5.com) for published data regarding holding strength.

Copyright 2009, Metal Roof Innovations, Ltd. S-5!™ products are patented by Metal Roof Innovations, Ltd.  
version 100109

Distributed by